


Renderplas

PVC_u BEADING FOR RENDERING, PLASTERING & DRYLINING APPLICATIONS



BELLCAST BEADS

RB15

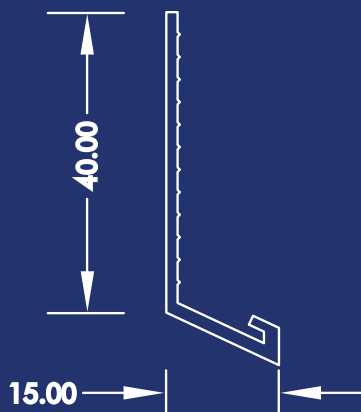

APPLICATION:

At or above Damp Course level and window heads to allow rainwater to drip clear of the underlying substrate.

CUTTING TO LENGTH:

Use fine toothed hacksaw or tin snips. PVC Pipe Weld adhesive can be used for butt joints.

COLOUR:

Currently stocked in the colour Sand (cream). Although upon request a range of colours are available (see the website). All Renderplas Beads are paint and texture friendly.

STORAGE:


Store flat away from heat and direct sun.

FIXING:

To fix bead, apply a continuous line of adhesive mortar and level straight. Mechanical fixings at centre and both ends are recommended. For more information view the website.

PACKING:

25 no. x 2.5m lengths in boxes (total 62.5lm).
25 no. x 3.0m lengths in boxes (total 75.0lm).

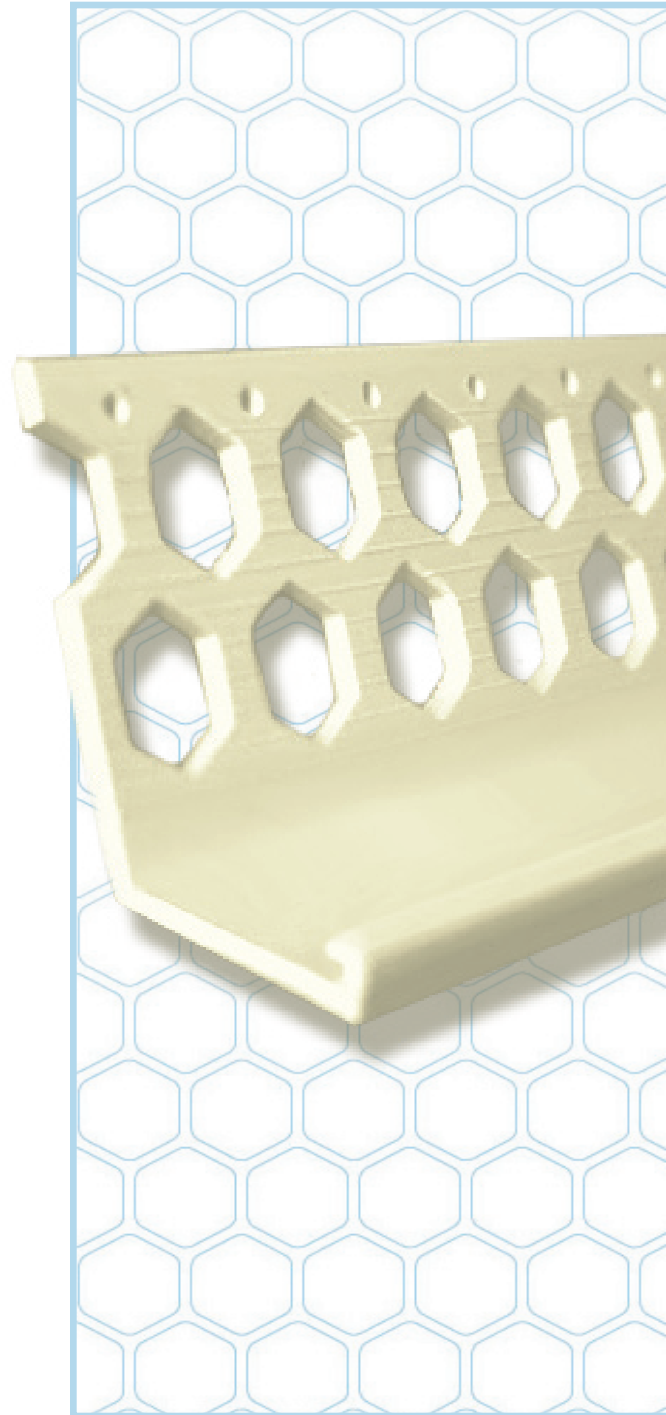

Profile Description:

Code:

Bead Length (m):

Render/Plaster Depth (mm):

Weight per box (kgs):

Box Dimensions (cm):

15mm Bellcast Bead

RB152.5

2.5 (total 62.5lm)

10-17

8.5

252 X 10 X 8.5

15mm Bellcast Bead

RB153.0

3.0 (total 75.0lm)

10-17

10.0

303 X 10 X 8.5